


LED Track Light HERTEL Datasheet



Number of heads	1
Mounting	Track mounting
Lamps description	LED 20W, 30W, 2700K-6000K, CRI 90+
Luminaire luminous flux	100W/Lm 3000Lm
Voltage (V)	220/240
Environment	Indoor
Notes	LED Track Light HERTEL driver is located outside of the luminaire. This allows better cooling for the COB LED and prevents it from overheating.

LED light to be installed on 3-phase 4 wire track.



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350 degrees
Light distribution symmetry	Symmetric
Beam angle	24° Medium
Color temperature	2700K-6000K

White matte Gray matte
Black matte


ELECTRICAL

Wattage	20W, 30W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	110-240V AC

Dimensions: 180 x Ø95mm

PHYSICAL

Spot diameter (mm)	Ø 95
Construction material	6063 Aluminium
Weight (kg)	1,0
Luminaire lifespan	50 000h
LED module	PHILIPS/BRIDGELUX COB LED 100 lm/W LIFUD
Driver	Flicker free, PHILIPS SLIM, ALL-LOOKING Optional drivers: DALI, DIM
Working temperature	Operation: -30 to +40 °C

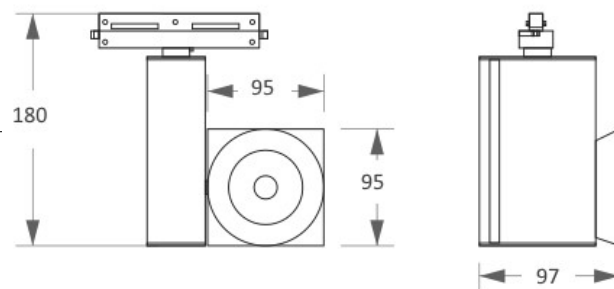

CERTIFICATIONS

