

Important Read these instructions fully before using the LED Ceiling Light. Retain these instructions for future reference.

1. Non professional electricians are not allowed to install at will.
2. Failure to follow the instructions may cause danger;
3. Illegal operation may cause your property loss and even endanger your life safety.
4. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.

Comparison table of applicable lamp parameters

Model	Size	Power	Lumen	IP Class	IK Class	Voltage	EPISTAR LED Chip 2835 QTY	Warranty
VS-FL-18-IP44	230x25mm	18W	2160Lm	IP44	IK07	170-265V	162	3 years
VS-FL-18-PIR-IP44	230x25mm	18W	2160Lm	IP44	IK07	170-265V	162	3 years
VS-FL-24-IP44	300x25mm	24W	2880Lm	IP44	IK07	170-265V	216	3 years
VS-FL-24-PIR-IP44	300x25mm	24W	2880Lm	IP44	IK07	170-265V	216	3 years
VS-FL-32-IP44	400x25mm	32W	3840Lm	IP44	IK07	170-265V	288	3 years
VS-FL-32-PIR-IP44	400x25mm	32W	3840Lm	IP44	IK07	170-265V	288	3 years
VS-FL-40-IP44	500x27mm	40W	4800Lm	IP44	IK07	170-265V	360	3 years
VS-FL-40-PIR-IP44	500x27mm	40W	4800Lm	IP44	IK07	170-265V	360	3 years
VS-FL-50-IP44	600x27mm	50W	6000Lm	IP44	IK07	170-265V	416	3 years
VS-FL-50-PIR-IP44	600x27mm	50W	6000Lm	IP44	IK07	170-265V	416	3 years



Color Temperature Corresponding To Dialing Character: DL=6000K NW=4000K WW=3000K
 Product Material: ABS + PS + PS anti UV;
 Anti electric Shock Protection Grade: Class II;
 Electrical Parameters: Constant Current 0.9PF No Stroboscopic;
 Protection Grade: IK07; Ambient temperature requirements for lamps: -20°C-45°C
 Luminous Angle: 120°
 Maximum Service Life Of Lamp: 3 years.


1. By dialing the code, you can adjust the light color temperature you need at will;
2. The adjustment range of color temperature is 3000K / 4000K / 6000K respectively;
3. After the color temperature adjustment is completed, the lamps can be installed;
4. Quick connect installation interface and hanging board can switch color temperature at will after installation.

The installation steps are as follows

1. Unpack the accessories package and check whether the installation accessories are complete;
2. Remove the hanging plate behind the lamp and locate the screw hole position on the ceiling;
3. Drill holes according to the screw hole position and fully insert the plastic bolt into the hole position;
4. Fix the ceiling hanging plate with screws, and one of the screws is threaded into the safety rope for fixation;
5. Without standard safety rope, the ceiling plate can be directly fixed for the next step.

1. Lift the lamp with safety rope (without anti falling rope, directly lift it by hand);
2. In case of power failure, use the quick connect terminal on the lamp to connect with the mains;
3. After repeatedly confirming whether the power cord on the quick connect terminal is firmly stuck, proceed to the next step.

1. Carefully observe the rotation or pushing direction of the padlock on the rear cover of the lamp;
2. Completely clip the lamp into the fixed ceiling plate (there is no gap between the lamp and the wall);
3. Rotate or push according to the direction of padlock rotation or push;
4. Hearing the "click" indicates that it has been installed in place, and then power on the test lamp.

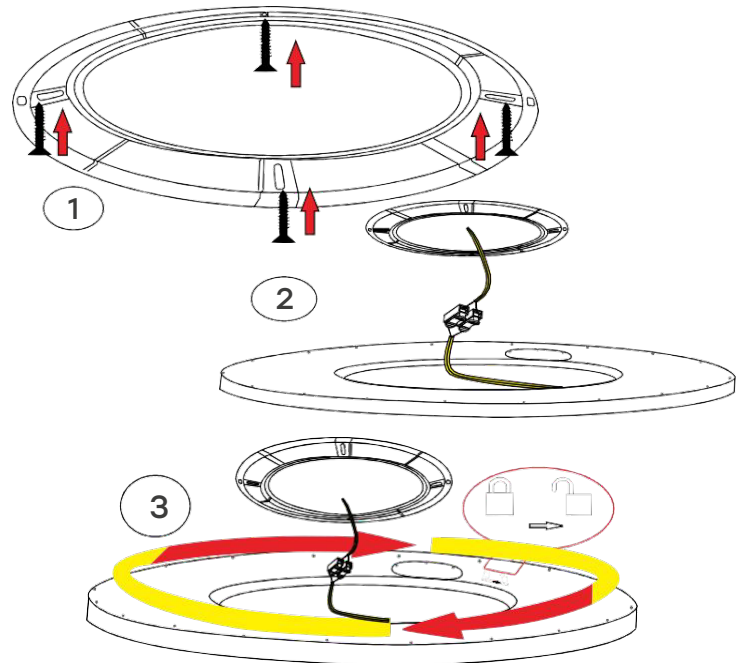

WARNINGS: Risk of electric shock. Do not submerge in water. Do not use the light near flammable or explosive materials. • Do not use the lamp with damaged parts or disassemble it for self-repair. If the lamp is damaged, please seek professional service. • Do not allow children to play with the lamp.

WARRANTY INFORMATION: • Warranty covers material or manufacturing defects only. • Warranty repairs may only be performed by an authorized service center. • When submitting a warranty claim, you must submit the original purchase invoice (with the date of purchase). • The warranty will not apply in the following cases: • Improper use, e.g. device overload, use of non-approved accessories • Application of force, damage caused by external influences • Damage caused by failure to follow the instructions for use, e.g. connection to an unsuitable electrical network or failure to follow the installation instructions • Partially or completely disassembled luminaire

This marking indicates that this product must not be disposed of with other household waste throughout the EU. To prevent potential harm to the environment or human health from uncontrolled waste disposal, please recycle responsibly.
 Contact a professional company dealing with the disposal of such products in your country. They can recycle this product in an environmentally friendly way.



Importer: SHEVLAD LTD
 Lubānas Street 78, Riga, Latvia, LV-1073
 info@euroled.lv, +371 28886262
 www.euroled.lv