
PRODUCT DATASHEET
TELA80_7W_B_3K_LED_560

Surface LED spotlight with flood distribution.

360° rotatable. IP20. Body: Aluminium

Powder coated white or black color.

Complete with 3000K LED



IP20

IK05

81,16 lm/W

TECHNICAL DATA		Product code	6006000021
Electrical data			
Nominal wattage	7 W		
Operating wattage	6,9 W		
Nominal Voltage	165-240 V		
Power factor	≥0.50		
Mains frequency	50/60 Hz		
Photometrical data			
Color temperature (CCT)	3000 K		
Luminous efficiency	81,16 lm/W		
Luminous flux	560 lm		
Color rendering index (CRI)	≥80		
Unified Glare Rating (UGR)	<21,5		
Flicker index	Flicker-Free		
Light technical data			
Beam angle	30°		
Weight			
Weight Neto	0,144 kg		
Materials			
Body material	Aluminium		
Housing color	Black		
Difuser material	Polycarbonate		
Operating conditions			
Ambient temperature range	-20...+65°C		
Lifespan			
Lifespan L80/B50 at 25°	30000 h		
Led Brand	SMALITE 3030		
Driver	VACE		
Mounting information			
Mounting type	Surface		
Mounting location	Ceiling/ Wall		
Capabilities			
Dimmable	No		
Type of connection	Wires 2-pole		

Standards and Certificates

Protection class IK	IK05
Type of protection IP	IP20
Standards	CE, RoHS
Warranty	36 months

LOGISTICAL DATA


Main package

Product code	6006000021
Package	Carton
Units in carton	1 pcs
Package diameters, weight bruto	100x60x120 mm ; 0,178 kg
Product EAN code	4772007012831

Second package

Package	Carton
Units in second package	48 pcs
Package diameters, weight bruto	480x380x220 mm ; 9,082 kg
ShipPing carton EAN code	-

ENERGY EFFICIENCY

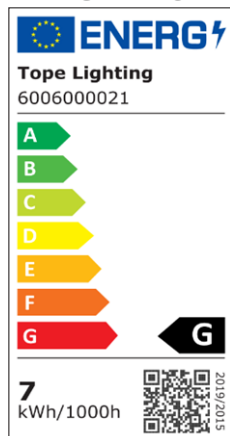

ALL FAMILY PRODUCTS

6006000017	TELA80_7W_W_3K_LED_560
6006000018	TELA80_10W_W_3K_LED_800
6006000019	TELA80_7W_W_4K_LED_560
6006000020	TELA80_10W_W_4K_LED_800
6006000021	TELA80_7W_B_3K_LED_560
6006000022	TELA80_10W_B_3K_LED_800
6006000023	TELA80_7W_B_4K_LED_560
6006000024	TELA80_10W_B_4K_LED_800



