



## LED Track Light B-series 30W Datasheet




Number of heads	1
Mounting	Track mounting
Lamps description	Heavy heat sink, CRI 90
Luminaire luminous flux	110 lm/W
Voltage (V)	220-240
Environment	Indoor
Notes	LED track light B-series Lifud no flicker driver housing is located on the outside of the luminaire. This allows the track light better cooling and prevents COB LED overheating.

### OPTICAL


Reflector finish	Aluminum high quality GR reflector
Aiming	Adjustable 350° and 90°
Light distribution symmetry	Symmetric
Beam angle	15°, 24°, 36°, 60°
Color temperature	2700K, 3000K, 3500K, 4000K, 5000K, 6000K

LED light to be installed on 3-phase 4 wire track.



### ELECTRICAL

Wattage	30 W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60 HZ
Voltage	220-240 V




### PHYSICAL

Spot diameter (mm)	Ø 85
Construction material	Aluminium
Weight (kg)	1,6
Luminaire lifespan	50 000h
LED module	BRIDGELUX COB LED
Driver	Lifud Flicker free, Optional driver: DIM
Working temperature	-30 to +40 °C
Warranty	5 years from purchase date

Dimensions

## 30W

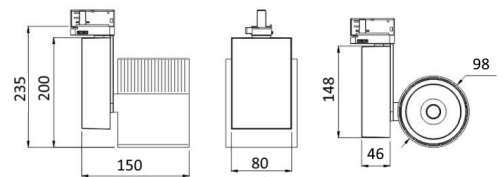

### CERTIFICATIONS

