



## LED Track Light Berlin Slim UGR Datasheet

Number of heads	1
Mounting	Track mounting
Lamps description	LED 20 W, 30 W, CRI 90
Luminaire luminous flux	110 lm/W
Voltage (V)	220-240
Environment	Indoor
Notes	LED Track Light Berlin Slim driver is located inside of the thin luminaire adapter. This makes it possible to avoid additional heat when operating the luminaire.

### OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable 350° and 90°
Light distribution symmetry	Symmetric
Beam angle	24°, 40°, 60°
Color temperature	3000K, 3500K, 4000K
UGR	19

### ELECTRICAL


Wattage	20 W, 30 W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60 HZ
Voltage	220-240 V

### PHYSICAL

Spot diameter (mm)	Ø 70
Construction material	Aluminium, PVC
Weight (kg)	1,0
Luminaire lifespan	50 000h
LED module	BRIDGELUX COB LED
Driver	ALLOOKING, PHILIPS
Working temperature	-30 to +40 °C
Warranty	5 years from purchase date




LED light to be installed on 3-phase 4 wire track.



● White ● Black

Dimensions: Ø70 x 245mm

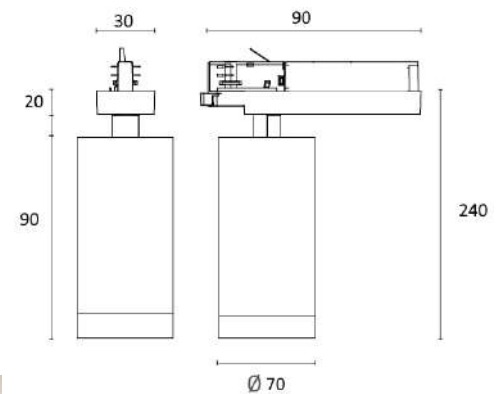

### CERTIFICATIONS

