

**MORA** LED CEILING LIGHT SURFACE ROUND

**PRODUCT DATASHEET**
**MORA95\_SU\_B\_60W\_LED\_5700**

A surfaced/suspended with mounting cables (max 1m long cables) , circular LED luminaire, with 100mm profile. The luminaire have the option of choosing a color temperature from 3000 to 6500K. Electronic, fixed output control gear. IP20. Body: steel, Black (RAL 9005). Diffuser: acrylic. Connection via push wire terminal blocks. Supplied with adjustable wire and cables, for suspended mounting. Complete with 3000 - 4000 - 6500K LED. There is option to change CCT by dip switch.



<b>IP20</b>	<b>IK05</b>	<b>106,35 lm/W</b>
-------------	-------------	--------------------

<b>TECHNICAL DATA</b>		Product code	6004000033
Electrical data			
Nominal wattage	60 W		
Operating wattage	54,64 W		
Nominal Voltage	220-240 V		
Power factor	≥0.90		
Mains frequency	50/60 Hz		
Photometrical data			
Color temperature (CCT)	3000-6500 K		
Luminous efficacy	106,35 lm/W		
Luminous flux	5811 lm		
Color rendering index (CRI)	≥80		
Unified Glare Rating (UGR)	<21,5		
Flicker index	Flicker-Free		
Light technical data			
Beam angle	120°		
Dimensions and weight			
Diameter	Ø600 mm		
Height	100 mm		
Weight Neto	4,062 kg		
Materials			
Body material	Aluminium		
Housing color	Black		
Difuser material	Acrylic		
Operating conditions			
Ambient temperature range	-20...+65°C		
Lifespan			
Lifespan L70/B50 at 25°	50000 h		
Led Brand	BRIDGELUX		
Driver	TOPE(YLQD-4-60)		

## Mounting information


Mounting type	Surfaced / Suspended
Mounting location	Ceiling
Capabilities	
Dimmable	No
Type of connection	Via push wire terminal blocks
Standards and Certificates	
Protection class IK	IK05
Type of protection IP	IP20
Standards	CE, RoHS
Warranty	36 months

## LOGISTICAL DATA


### Main package

Product code	6004000033
Package	Carton box
Units in carton	1 pcs
Package diameters, weight bruto	650x645x170 ; 5,544 kg
Product EAN code	4772007005345

## ENERGY EFFICIENCY

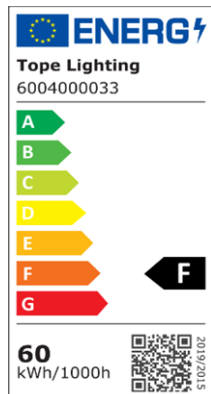

## PHOTOMETRIC DIAGRAM

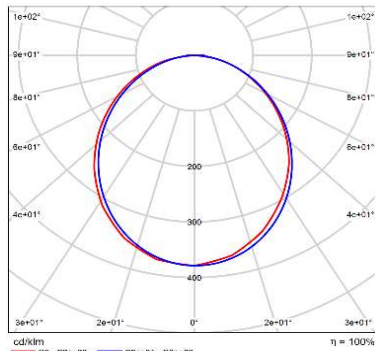

Polar LDC

## ALL FAMILY PRODUCTS

6004000029	MORA95_SU_W_40W_LED_3800
6004000030	MORA95_SU_W_60W_LED_5700
6004000031	MORA95_SU_W_70W_LED_6650
6004000032	MORA95_SU_B_40W_LED_3800
6004000033	MORA95_SU_B_60W_LED_5700
6004000034	MORA95_SU_B_70W_LED_6650
6004100029	MORA95_SU_W_40W_LED_3800_0-10V
6004100031	MORA95_SU_W_70W_LED_6650_0-10V
6004100032	MORA95_SU_B_40W_LED_3800_0-10V
6004100034	MORA95_SU_B_70W_LED_6650_0-10V

