

PRODUCT DATASHEET

SOPOT_2x24W_S_LED_4470

Surfaced square LED luminaire. Electronic, Infrared wireless dimmable and CCT adjustable output control gear. Body white painted steel.
Diffuser: Polycarbonate (PC).
IP20. 3000 to 6500K CCT adjustable.
Remote included to the set.



IP20

IK05

97,02 lm/W

TECHNICAL DATA

SKU:

6004000074

Electrical data

Nominal wattage	2x24 W
Operating wattage	46,01 W
Nominal Voltage	165-240 V
Power factor	≥0.90
Mains frequency	50/60 Hz

Photometrical data

Color temperature (CCT)	3000 to 6500 K
Luminous efficacy	97,02 lm/W
Luminous flux	4464 lm
Color rendering index (CRI)	≥80
Unified Glare Rating (UGR)	<21.5
Flicker index	Flicker-Free

Light technical data

Beam angle	120°
------------	------

Dimensions and weight

Dimension	380x380x65 mm
Weight Neto	0,928 kg

Materials

Body material	Steel
Housing color	White
Difuser material	Polycarbonate (PC)

Operating conditions

Ambient temperature range	-20...+65°C
---------------------------	-------------

Lifespan

Lifespan L70/B50 at 25°	30000 h
Led Brand	EPISTAR
Driver	TOPE (8-24W*2(MAX))

Mounting information

Mounting type	Surface
Mounting location	Ceiling

Capabilities

Dimmable	Yes
Type of connection	Via wires terminal blocks
Standards and Certificates	
Protection class IK	IK05
Type of protection IP	IP20
Standards	CE, RoHS
Warranty	36 months

LOGISTICAL DATA

Main package

Product code	6004000074
Package	Carton
Units in carton	1 pcs
Package diameters, weight bruto	390x390x75mm ; 1,158 kg
Product EAN code	4772007009244

Second package

Package	Carton box
Folding carton boxes in shipping carton	10 pcs
Package diameters, weight bruto	795x400x415mm ; 12,646 kg
Shipping carton EAN code	4772007009268

ACCESSORIES

ENERGY EFFICIENCY


ENERGY
TopE Lighting
6004000074

A
B
C
D
E
F
G

48 kWh/1000h

2015/6/23
51002/612015

PHOTOMETRIC DIAGRAM

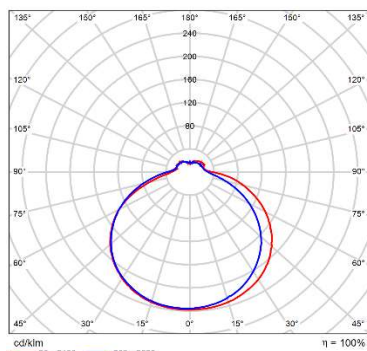

Polar LDC

ALL FAMILY PRODUCTS

6004000074 SOPOT_2x24W_S_LED_4470
6004000075 SOPOT_2x36W_S_LED_6740

