




LED AQUA COB927/965 Linear CCT flex stripe, 24V DC, 7W ww + 7W kw, IP68, 5m roll, 640 LED/m

Item number: 115787
EAN: 9009377148040

Product specification:

Dimmable:	Y
Dimming type:	PWM
Luminous flux:	1280 lm/m
Beam angle:	120°
Rated power:	14 W/m
Active power:	14 W/m
Rated voltage:	24 VDC
Colour temperature:	2700K - 6500K
Color rendering index:	90 CRI ra (1-8)
Protection class:	IP68
Ambient temperature:	-20°C - 40°C
Housing color:	white
Housing material:	Silicone
Weight:	320,0 g
Length:	5000,0 mm
Width:	12,0 mm
Height:	5,0 mm
Useful lifespan L70 B10:	38000 h
Useful lifespan L70 B50:	57000 h
Useful lifespan L80 B10:	37000 h
Useful lifespan L80 B50:	50000 h
Useful lifespan L90 B10:	33000 h
Useful lifespan L90 B50:	44000 h
Warranty in years	3

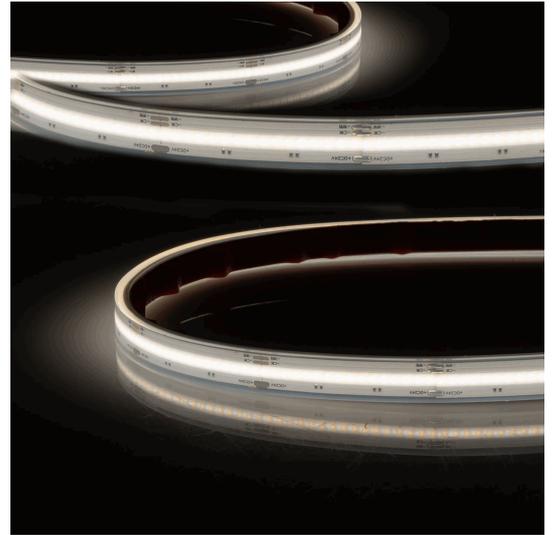

features:

Separation point: 25mm with 16 SMD each | Pitch (light point center-center): 3,12mm | 1 unit (roll) = 5m | max. flex stripe length per infeed: 5m | length tolerance + thermal expansion: 1% | no cooling profile required | incl. 3M VHB adhesive tape | Clean and degrease surface before application! Do not remove again! | silicone encapsulation | Special feature: connection cable on both sides

For specific test reports, certifications of conformity and further product information feel free to contact our office.



ISOLED®

CUSTOMISED LIGHT SOLUTIONS

